



BOHEMIAN

CARVING MATT | 200X1200MM



www.geogres.in



BOHEMIAN

SERIES



BY



www.geogres.in



200X
1200MM

SOLUTION TO ALL YOUR DESIGN NEEDS.

Geo Gres offers a complete solution for porcelain floors and walls that consist of excellent technical performance and unique aesthetic appeal.

The variety and complete range of Geo Gres porcelain meets your needs of contemporary planning for indoor and outdoor design solution.

THE FINEST WOODWORK FOR THE FINEST LIVING.

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.

200X1200MM



BROWN



NATURAL



PEACH



WHITE
OAK

BOHEMIAN

THE GEOGRES WOOD COLLECTION REPRODUCES THE IMPERFECTION AND HETEROGENEOUS DETAILS OF RECLAIMED WOODEN PLANKS, WHICH FIT IN PERFECTLY WITH THE STRICT MINIMALIS OF DESIGN AND LEND WARMTH AND AUTHENTICITY TO ANY AMBIENCE.





BOHEMIAN

**CRAFTED
INNOVATIVELY
FOR BEAUTIFUL
LIVING**



www.geogres.in



BOHEMIAN WHITE OAK

200X
1200MM

RANDOM
7

PHASE - 1

PHASE - 2

PHASE - 5

PHASE - 6

PHASE - 3

PHASE - 4

PHASE - 7

BOHEMIAN
WHITE
OAK





BOHEMIAN NATURAL

200X
1200MM

RANDOM
7

PHASE - 1

PHASE - 2

PHASE - 5

PHASE - 6

PHASE - 3

PHASE - 4

PHASE - 7



BOHEMIAN PEACH

200X
1200MM

RANDOM
7

PHASE - 1

PHASE - 2

PHASE - 5

PHASE - 6

PHASE - 3

PHASE - 4

PHASE - 7

BOHEMIAN PEACH





BOHEMIAN BROWN

200X
1200MM

RANDOM
7

www.geogres.in

PHASE - 1

PHASE - 2

PHASE - 5


PHASE - 6

PHASE - 3

PHASE - 4

PHASE - 7

LAYING SOLUTIONS

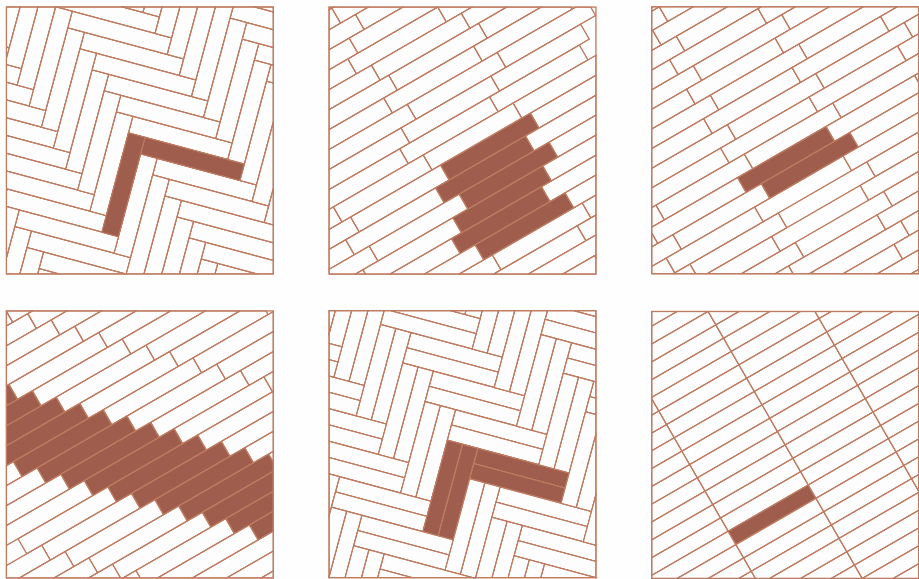


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

PORCELAIN STONEWARE - STANDARD EN 14411 (ISO 13006)
ANNEX G GROUP BIA, E ≤ 0.5%

TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR VALUES
				RECTIFIED	MATT
DIMENSIONS		Length and width	ISO 10545-2	± 0,3%, max 1 mm	In According
		Thickness		± 5%, max 0,5 mm	In According
		Wedging		± 0,3%, max 1,5 mm	In According
		Straightness of the edges		± 0,3%, max 0,8 mm	In According
		Flatness		± 0,4%, max 1,8 mm	In According
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	≥ 1300 N	≥ 2000 N
		Modulus of rupter		R ≥ 35 N/mm²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5




INSTALLATION ADVICE

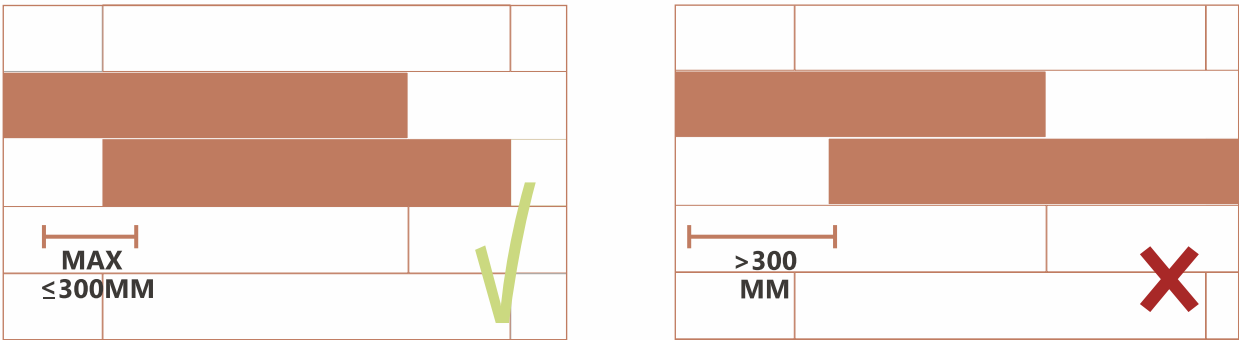

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES

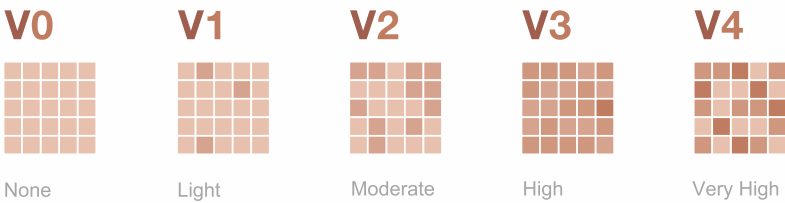

The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES





by

GeoGres Tiles

Opp. 132 KVA Sub-Station,
8-A N.H, Lalpar, Morbi - 363642,
Gujarat, INDIA.

P : +91 98256 04212
E : export@geogres.in

www.geogres.in