

BALBOA 200X1200MM www.geogres.in



200X 1200MM

by






Creativity using all element of nature and creativity to innovate unique master piece

From the geogres that have elevated the woodworking, the inspiration for a collection in porcelain stoneware of extraordinary beauty. Arthis infuses new lymph to the ability to transmute matter natural in craftsmanship, bringing warmth as a gift and elegance in any design context.






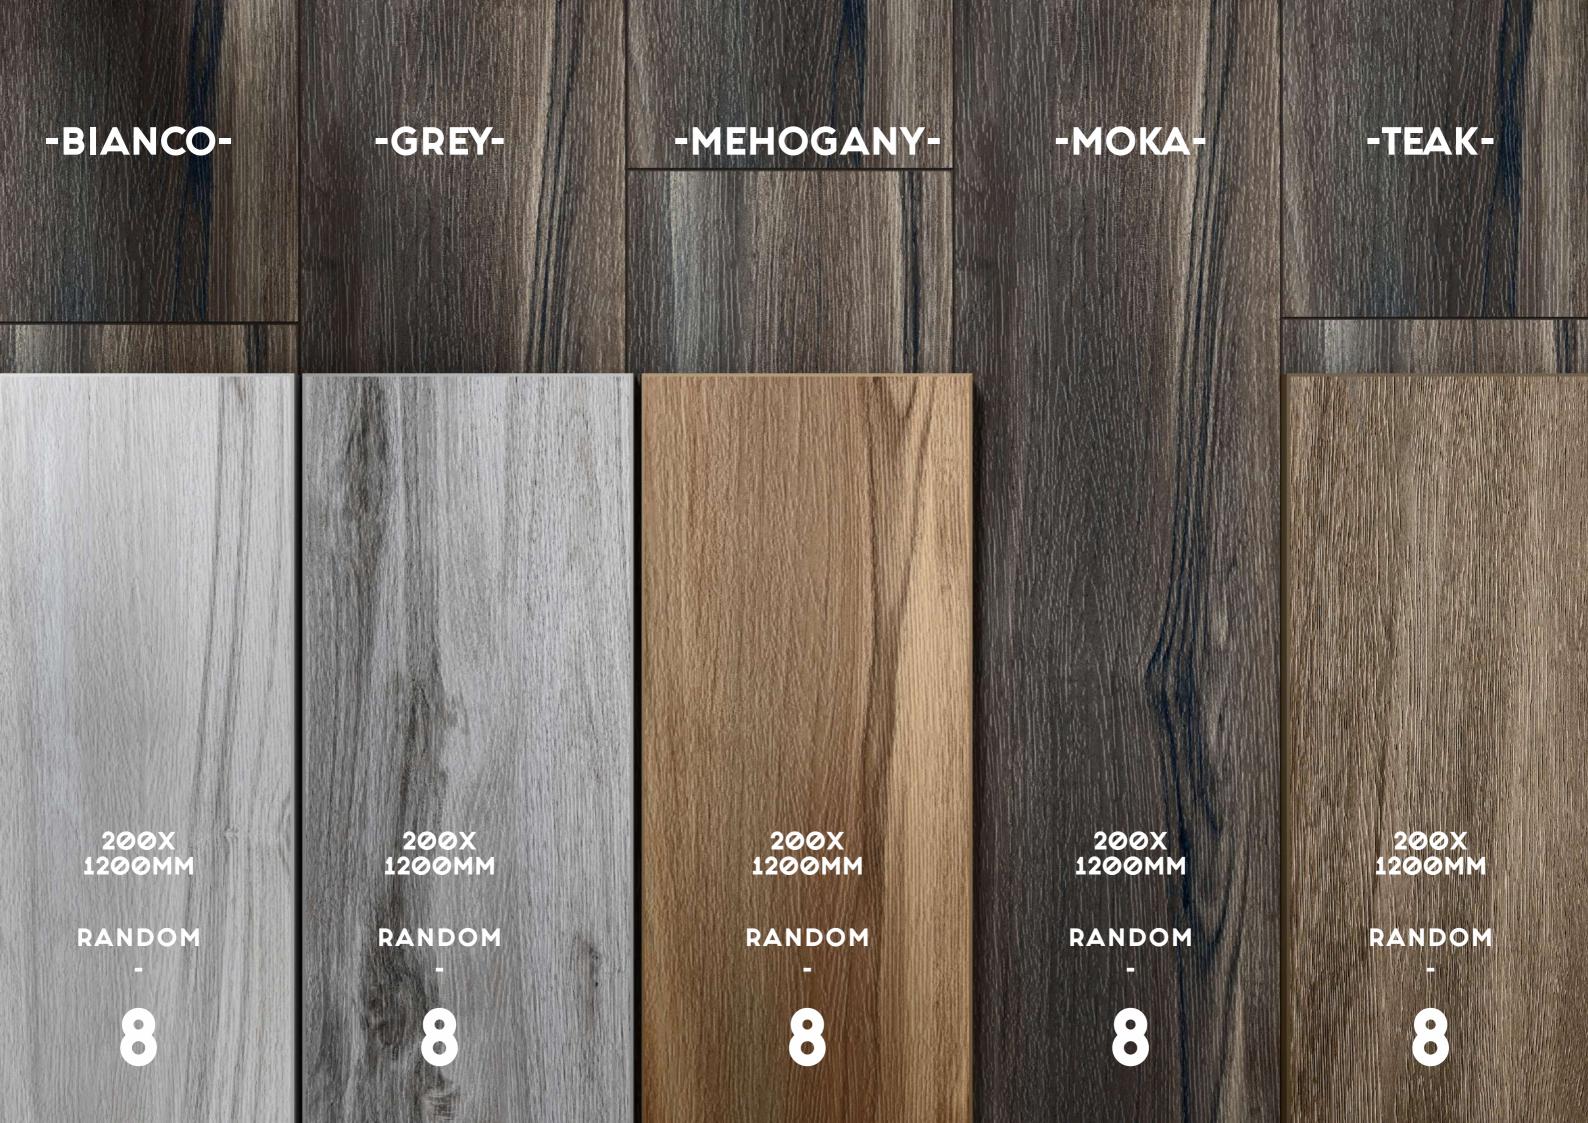

M@D SPACES

The emotion that only handmade things can offer blends with love for materials, respect for traditions and the continuous improvement resulting from masterful daily gestures. In the world of Arthis, past, present and future blend in a material that is full of life to offer a feeling of inspired contemporary craftsmanship to residential and commercial spaces.



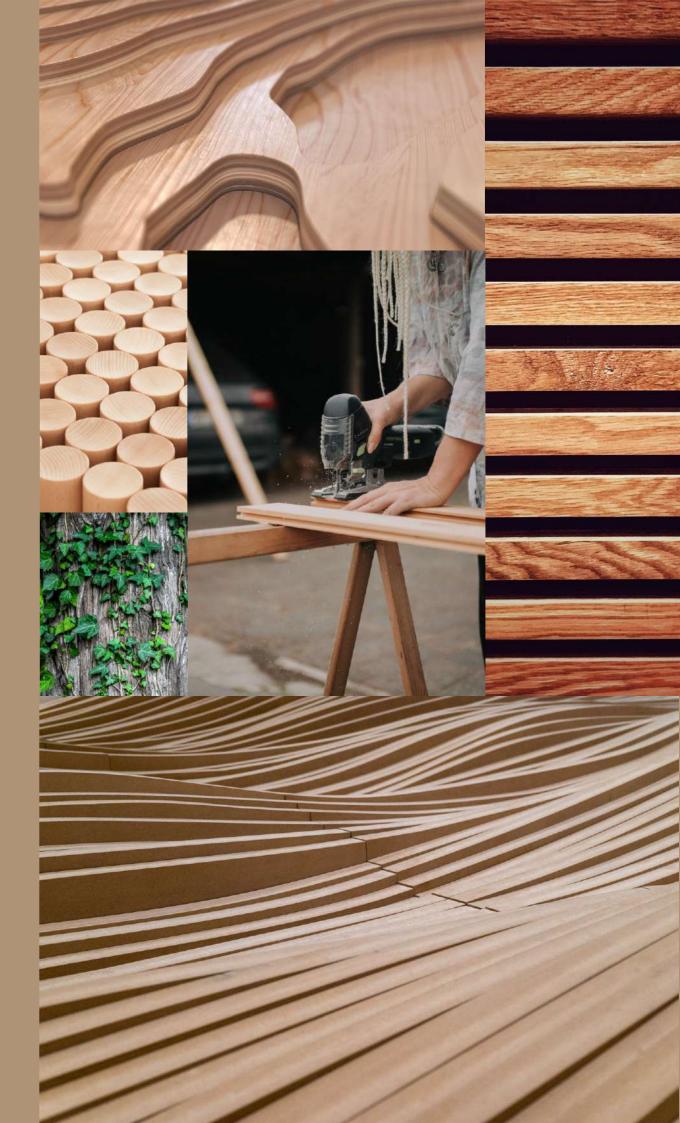

BALBOA BIANCO





200X **1200MM** RANDOM

www.geogres.in



BALBOA BIANCO



BALBOA GREY





200X **1200MM** RANDOM 10

www.geogres.in



PHASE - 6











BALBOA MEHOGANY






200X 1200MM

RANDOM

www.geogres.in



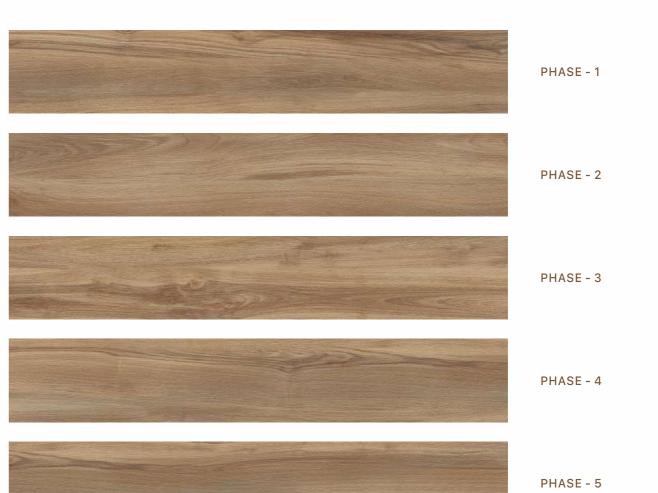

PHASE - 6

PHASE - 7

PHASE - 8











BALBOA TEAK





200X **1200MM** RANDOM

www.geogres.in



PHASE - 7











BALBOA TEAK



BALBOA MOKA





200X **1200**MM RANDOM

www.geogres.in













PHASE - 2



PHASE - 4



PHASE - 5





PHASE - 7



PHASE - 8




PHASE - 9






BALBOA MOKA

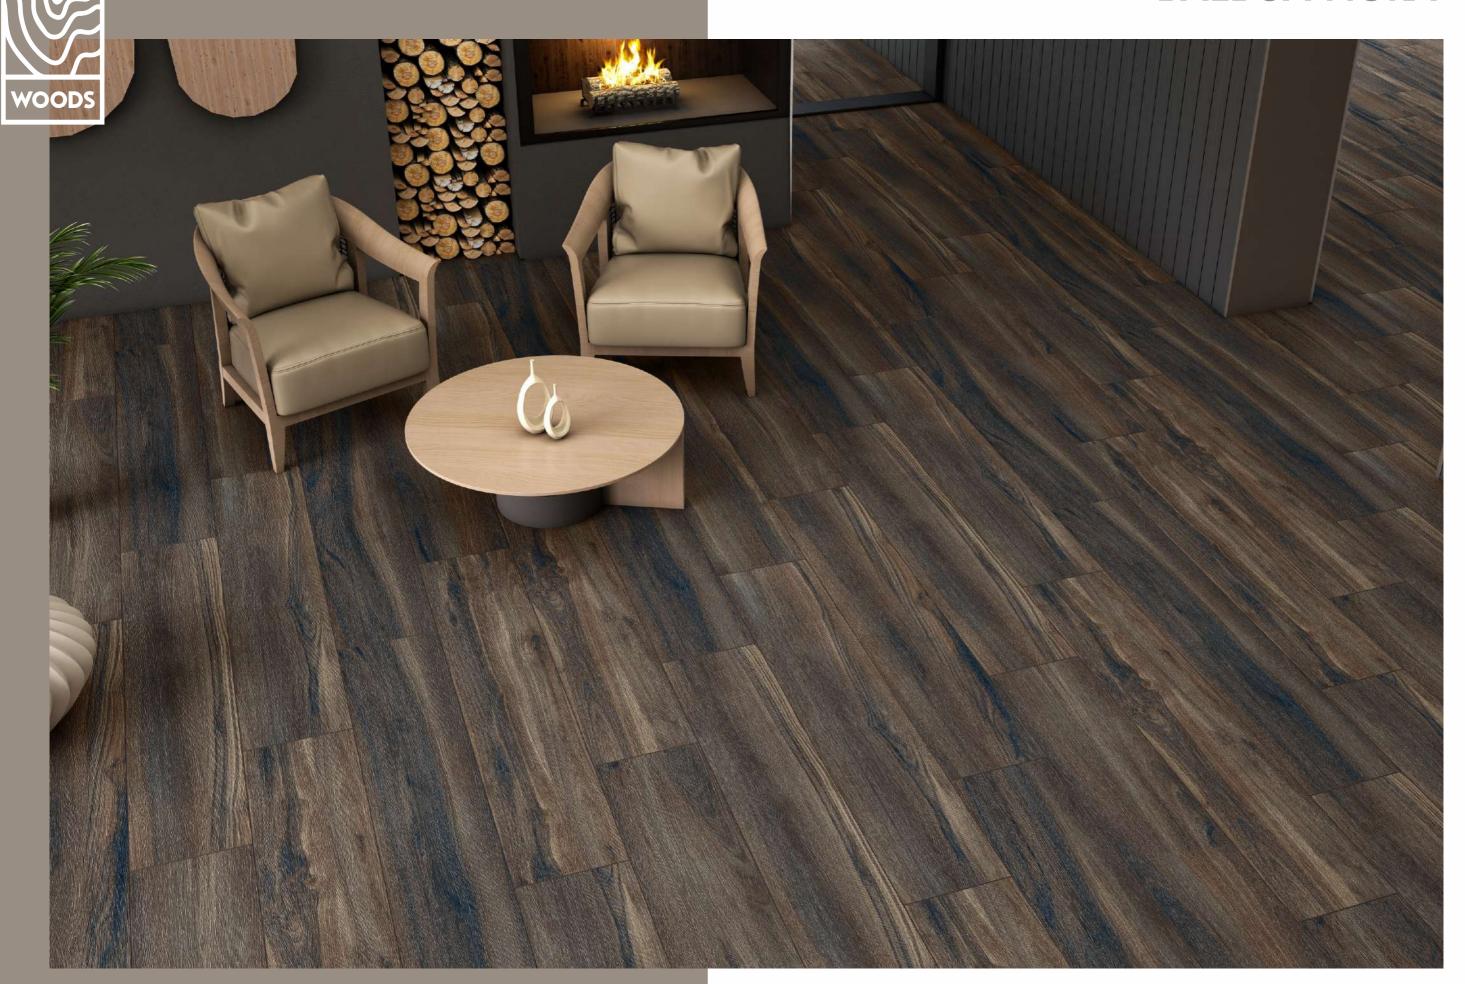

LAYING SOLUTIONS

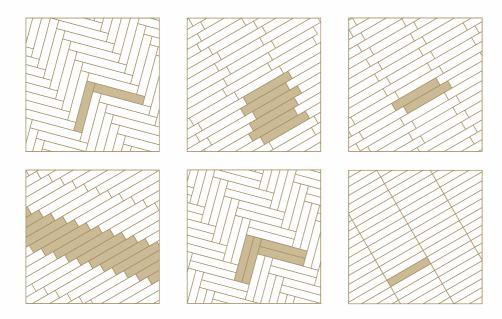

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


Porcelain stoneware - Standard EN 14411 (ISO 13006) **Annex G Group Bla, E ≤ 0.5%**


TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR ValuES
				RECTIFIED	MATT
DIMENSIONS	333	Length and width		<u>+</u> 0,3%, max 1 mm	In According
		Thickness		<u>+</u> 5%, max 0,5 mm	In According
		Wedging	ISO 10545-2	<u>+</u> 0,3%, max 1,5 mm	In According
		Straightness of the edges		<u>+</u> 0,3%, max 0,8 mm	In According
		Flatness		<u>+</u> 0,4%, max 1,8 mm	In According
STRUCTURE	• •	Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	- ISO 10545-4	S≥ 1300 N	S≥ 2000 N
		Modulus of rupter	150 10545-4	R≥ 35 N/mm²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicater by manufacture	PEI IV
THERMAL SHOCK	₽	Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
	\$ K	Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE	•	Resistance to high concentrations of acids and alkalis		Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis	ISO 10545-13	Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5





INSTALLATION ADVICE

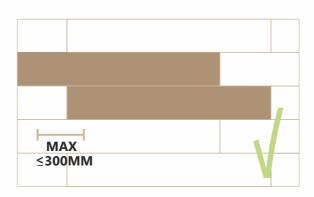

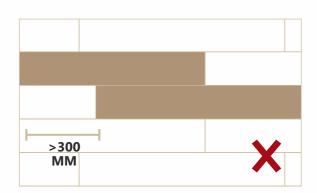

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES







9 MM









*We need minimum 2000sq/mtr order for R11 surface



by

GeoGres Tiles Opp. 132 KVA Sub-Station, 8-A N.H, Lalpar, Morbi - 363642, Gujarat, INDIA.

P: +91 98256 04212

