



DAKOTA

200X1200MM

www.geogres.in



200X
1200MM

by




A still life composition featuring a circular wood slice, a curved wood piece, and a small dark wood block on a wooden base. The circular slice shows a clear growth ring pattern. The curved piece is a thick, light-colored wood. The small block is a dark, reddish-brown wood. They are all resting on a flat, curved wooden surface. The background is a textured, light-colored wall.

DAKOTA
MAPLE

Creativity using
all element of
nature and creativity
to innovate unique
master piece

From the geogres that have elevated the
woodworking, the inspiration for a collection
in porcelain stoneware of extraordinary beauty. Arthis
infuses new lymph to the ability to transmute matter
natural in craftsmanship, bringing warmth as a gift
and elegance in any design context.

www.geogres.in

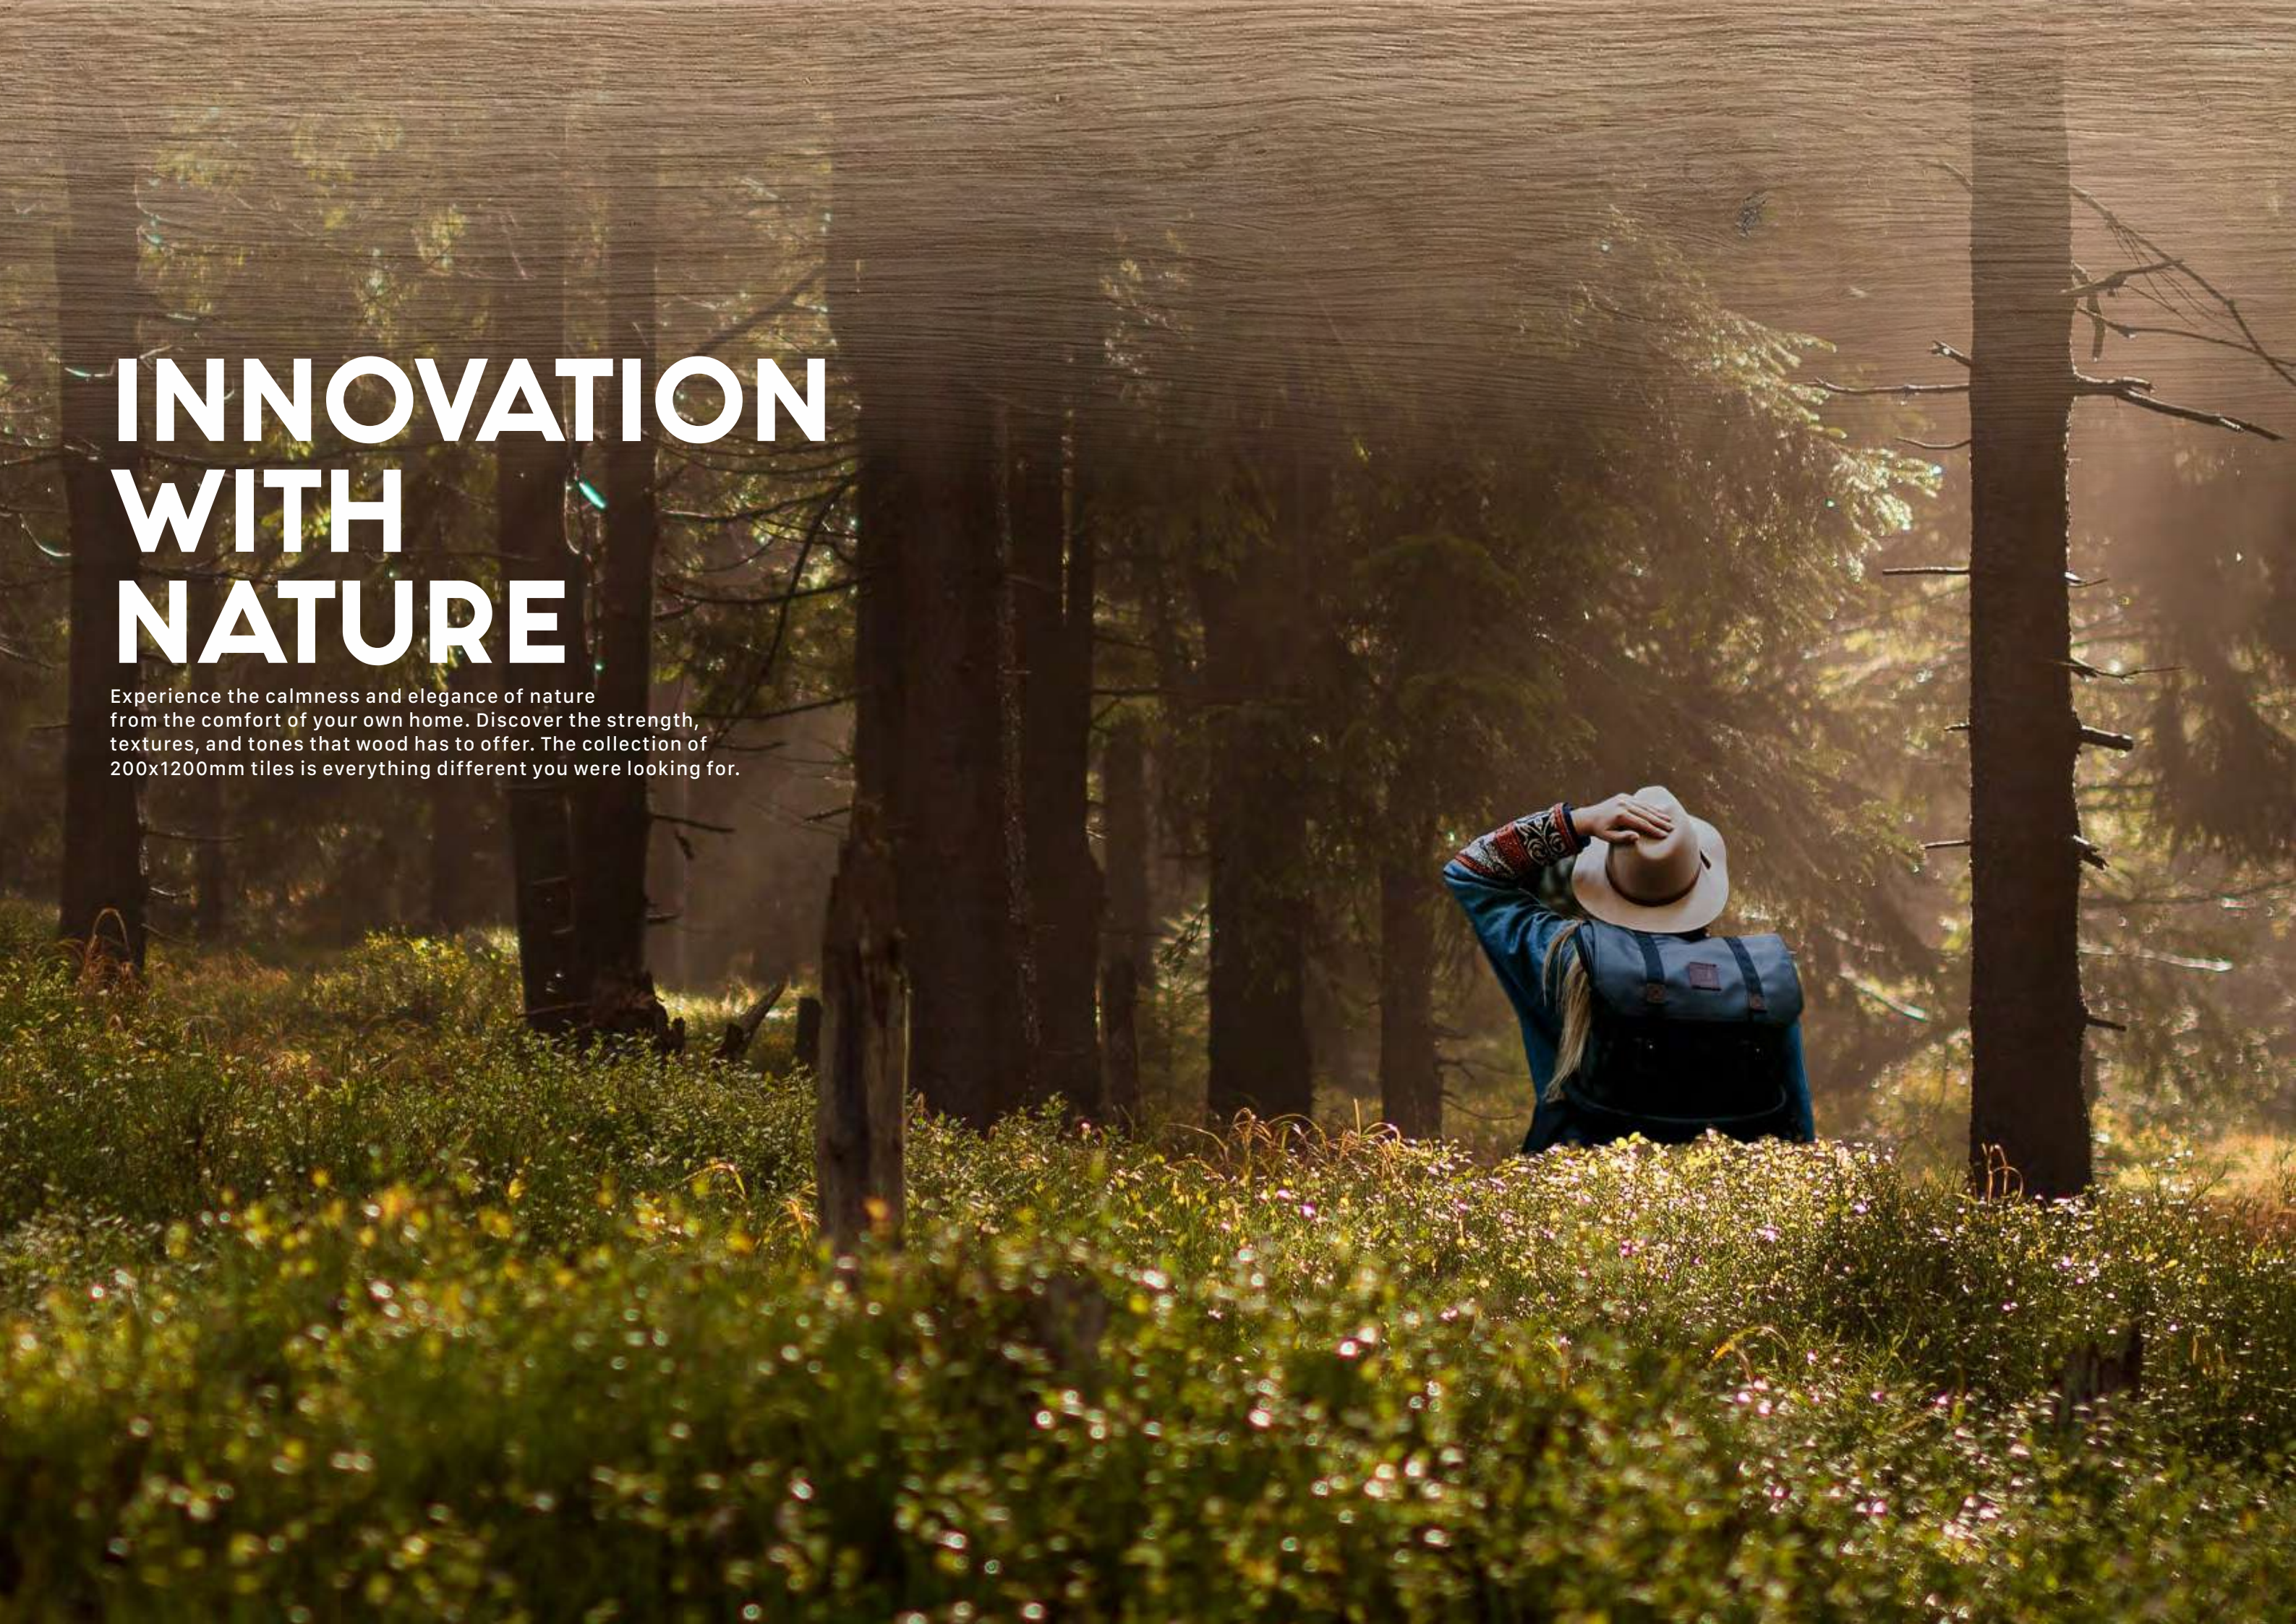

INNOVATION WITH NATURE

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.

-MAPLE-

-ASH-

-GRIS-

-NATURAL-

-WHITE OAK-

**200X
1200MM**

RANDOM

9

**200X
1200MM**

RANDOM

9

**200X
1200MM**

RANDOM

9

**200X
1200MM**

RANDOM

9

**200X
1200MM**

RANDOM

9

MOOD SPACES

The emotion that only handmade things can offer blends with love for materials, respect for traditions and the continuous improvement resulting from masterful daily gestures. In the world of Arthis, past, present and future blend in a material that is full of life to offer a feeling of inspired contemporary craftsmanship to residential and commercial spaces.





DAKOTA WHITE OAK



200X 1200MM RANDOM 10

www.geogres.in



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7



PHASE - 8



PHASE - 9



DAKOTA WHITE OAK





DAKOTA ASH



200X
1200MM

RANDOM
09

www.geogres.in



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9





DAKOTA ASH





DAKOTA GRIS



200X
1200MM

RANDOM
09

www.geogres.in



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9





DAKOTA NATURAL



200X
1200MM

RANDOM
10

www.geogres.in



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7



PHASE - 8



PHASE - 9



DAKOTA NATURAL



DAKOTA MAPLE



200X 1200MM RANDOM 10

www.geogres.in



PHASE - 1



PHASE - 2

PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6

PHASE - 7




PHASE - 8



PHASE - 9

LAYING
SOLUTIONS

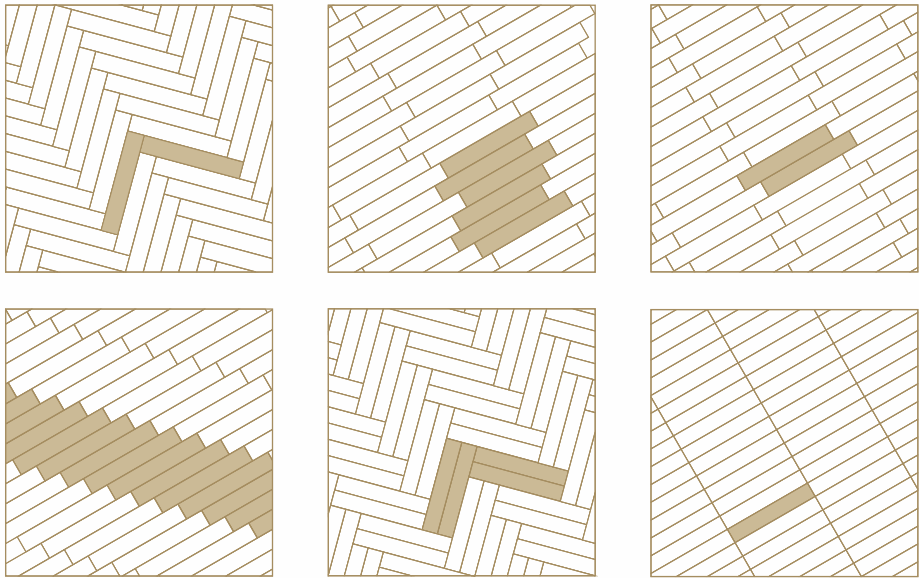


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

Porcelain stoneware - Standard EN 14411 (ISO 13006)
Annex G Group Bla, E ≤ 0.5%

TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR VaLUES
				RECTIFIED	MATT
DIMENSIONS		Length and width	ISO 10545-2	± 0,3%, max 1 mm	In According
		Thickness		± 5%, max 0,5 mm	In According
		Wedging		± 0,3%, max 1,5 mm	In According
		Straightness of the edges		± 0,3%, max 0,8 mm	In According
		Flatness		± 0,4%, max 1,8 mm	In According
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupter		R ≥ 35 N/mm ²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5




INSTALLATION ADVICE

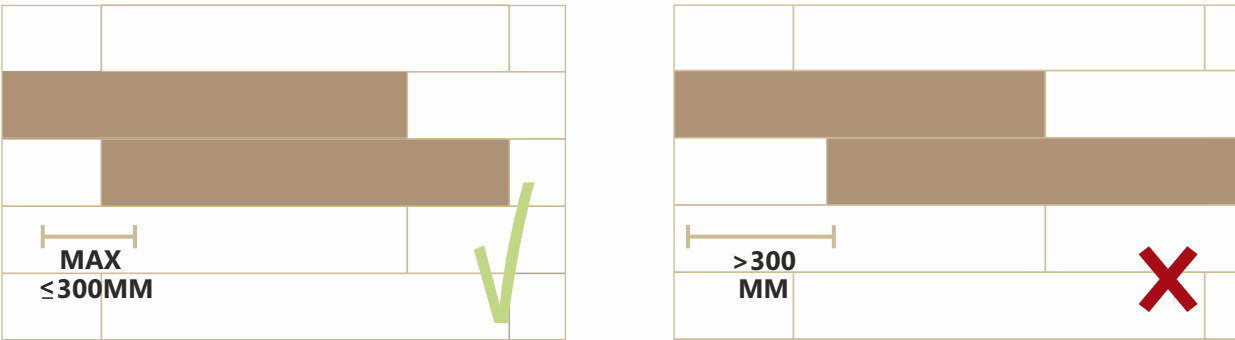

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES

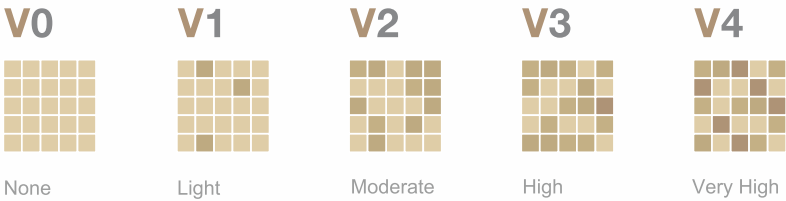

The V-Shape classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



*We need minimum 2000sq/mtr order for R11 surface



by

GeoGres Tiles

Opp. 132 KVA Sub-Station,
8-A N.H, Lalpar, Morbi - 363642,
Gujarat, INDIA.

P : +91 98256 04212
E : export@geogres.in

