



200X**1200MM**



BE

RGA





www.geogres.in







by



www.geogres.in



Magical Meeting of





200X1200MM

The most important truths are hidden, but this doesn't mean that they don't exist, they are just difficult to find. Geogres is a woodeffect surface contaminated with dusty colours that bring to mind the ancestral charm of the earth and a naturalness made up of sophisticated details.















Bargamo

ASM









BERGAMO ASH

www.geogres.in



7 RANDOM

200X 1200MM



















Bargamo









BERGAMOCEDAR

www.geogres.in



7 RANDOM






















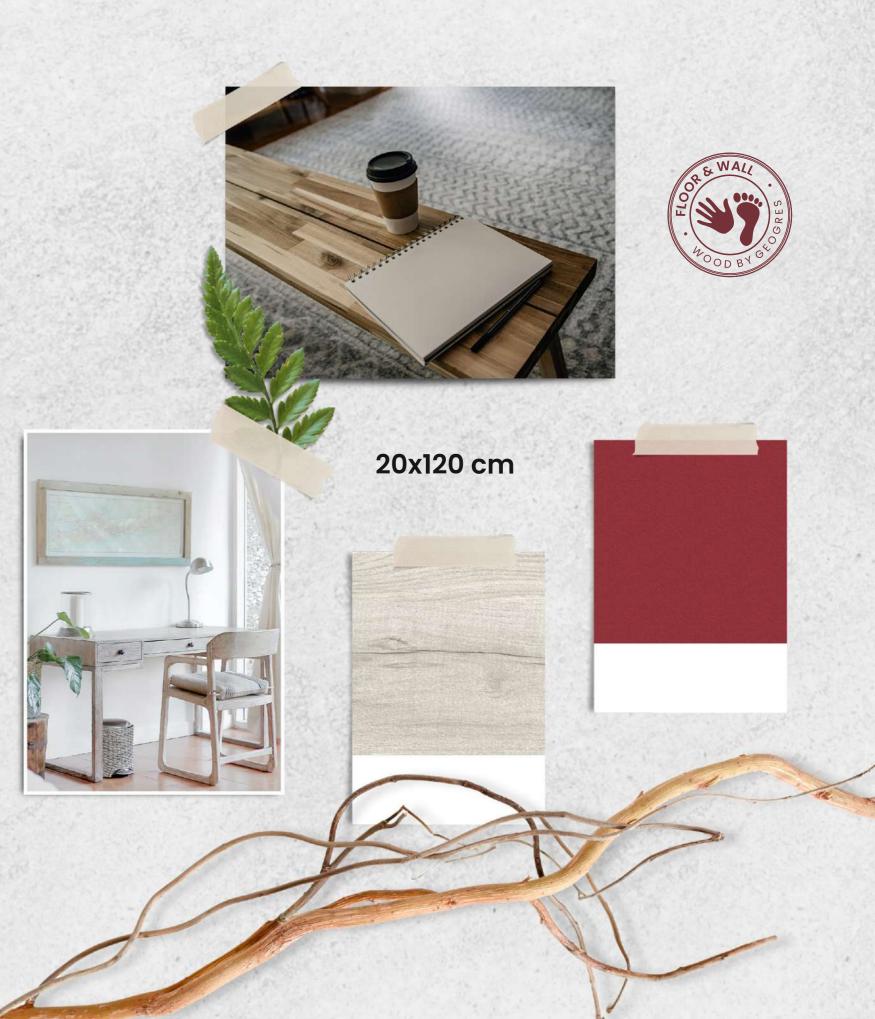





BERGAMO MAPLE

www.geogres.in



RANDOM


















Bargamo





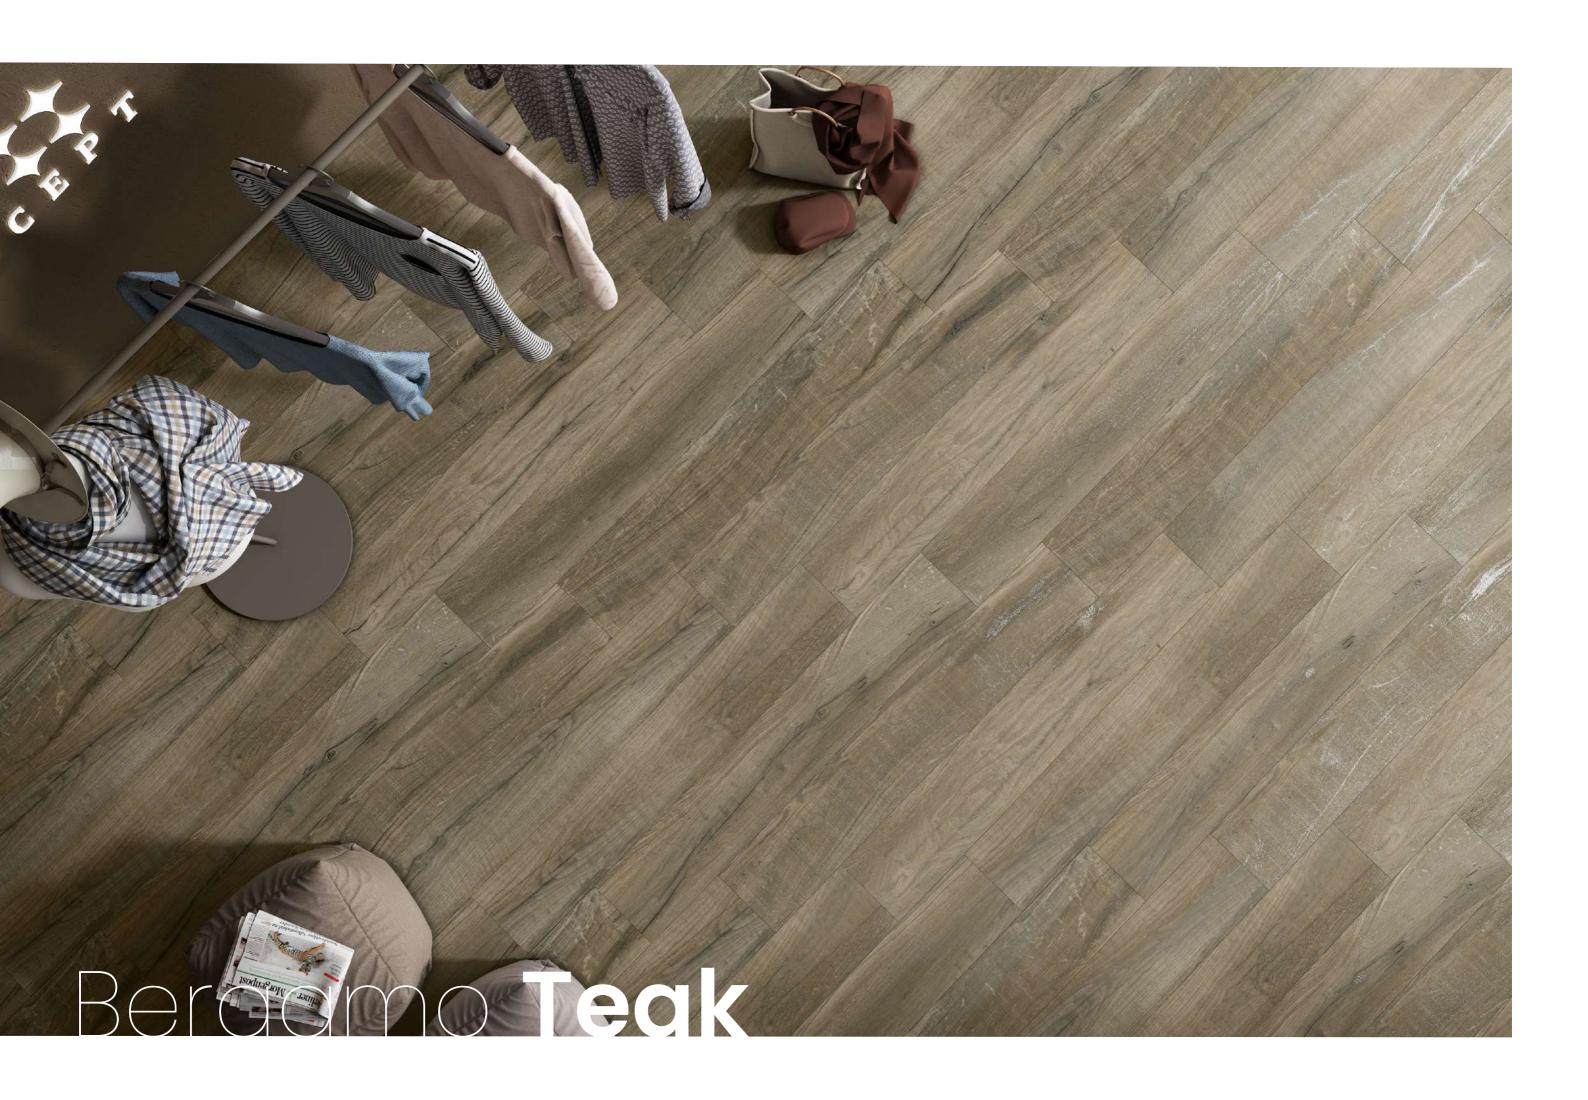



BERGAMO TEAK

www.geogres.in



7 RANDOM

200X 1200MM


















LAYING **SOLUTION**

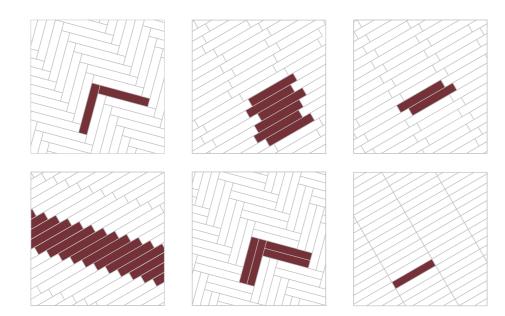

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.


Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group Bla, E ≤ 0.5%


TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR VALUES
				RECTIFIED	MATT
		Length and width	ISO 10545-2	<u>+</u> 0,3%, max 1 mm	In According
		Thickness		<u>+</u> 5%, max 0,5 mm	In According
DIMENSIONS		Wedging		<u>+</u> 0,3%, max 1,5 mm	In According
		Straightness of the edges		<u>+</u> 0,3%, max 0,8 mm	In According
		Flatness		<u>+</u> 0,4%, max 1,8 mm	In According
		Water absorption – average value %	ISO 10545-3	≤ 0,5%	In According
CTDUCTUDE		Breaking strength	ISO TOTAL A	S≥ 1300 N	S <u>></u> 2000 N
STRUCTURE	<u></u>	Modulus of rupter	- ISO 10545-4	R≥ 35 N/mm²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicater by manufacture	PEI IV
	₽	Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
THERMAL SHOCK	44K	Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
	•	Resistance to high concentrations of acids and alkalis		Class GHC Min.	Class GHA
CHEMICAL RESISTANCE		Resistance to low concentrations of acids and alkalis	ISO 10545-13	Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5





INSTALLATION ADVICE





The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES













*We need minimum 2000sq/mtr order for R11 surface



Delta Tiles Ltd.

8 A National Highway Opp. 132 kva Sub-Station, At lalpar, Morbi - 363642, Gujarat, INDIA.

Export Enquiry: +91 98256 04212 | export@geogres.in Domestic Enquiry: +91 97277 04212 | info@geogres.in

www.geogres.in

