



**REAL  
WOOD**



**200X  
1200MM**

200X  
1200MM



WOODS

by



REAL  
WOOD



Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.





find  
creativity  
from  
basics



## SOLUTION TO ALL YOUR DESIGN NEEDS.

Geo Gres offers a complete solution for porcelain floors and walls that consist of excellent technical performance and unique aesthetic appeal.

The variety and complete range of Geo Gres porcelain meets your needs of contemporary planning for indoor and outdoor design solution.



The finest  
woodwork  
for the  
finest  
living.





creativity  
for your  
kitchen &  
living



# COLORS

REAL WOOD ASH



REAL WOOD BIANCO




REAL WOOD NATURAL



REAL WOOD MAHOGANY



REAL WOOD OLIVE

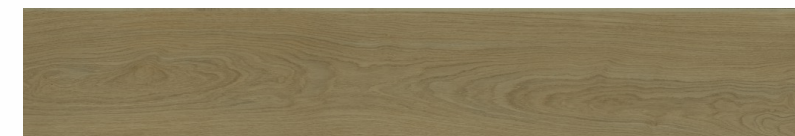

REAL WOOD PINE



REAL WOOD TEAK








# REAL WOOD ASH



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8


PHASE - 9







# REAL WOOD ASH

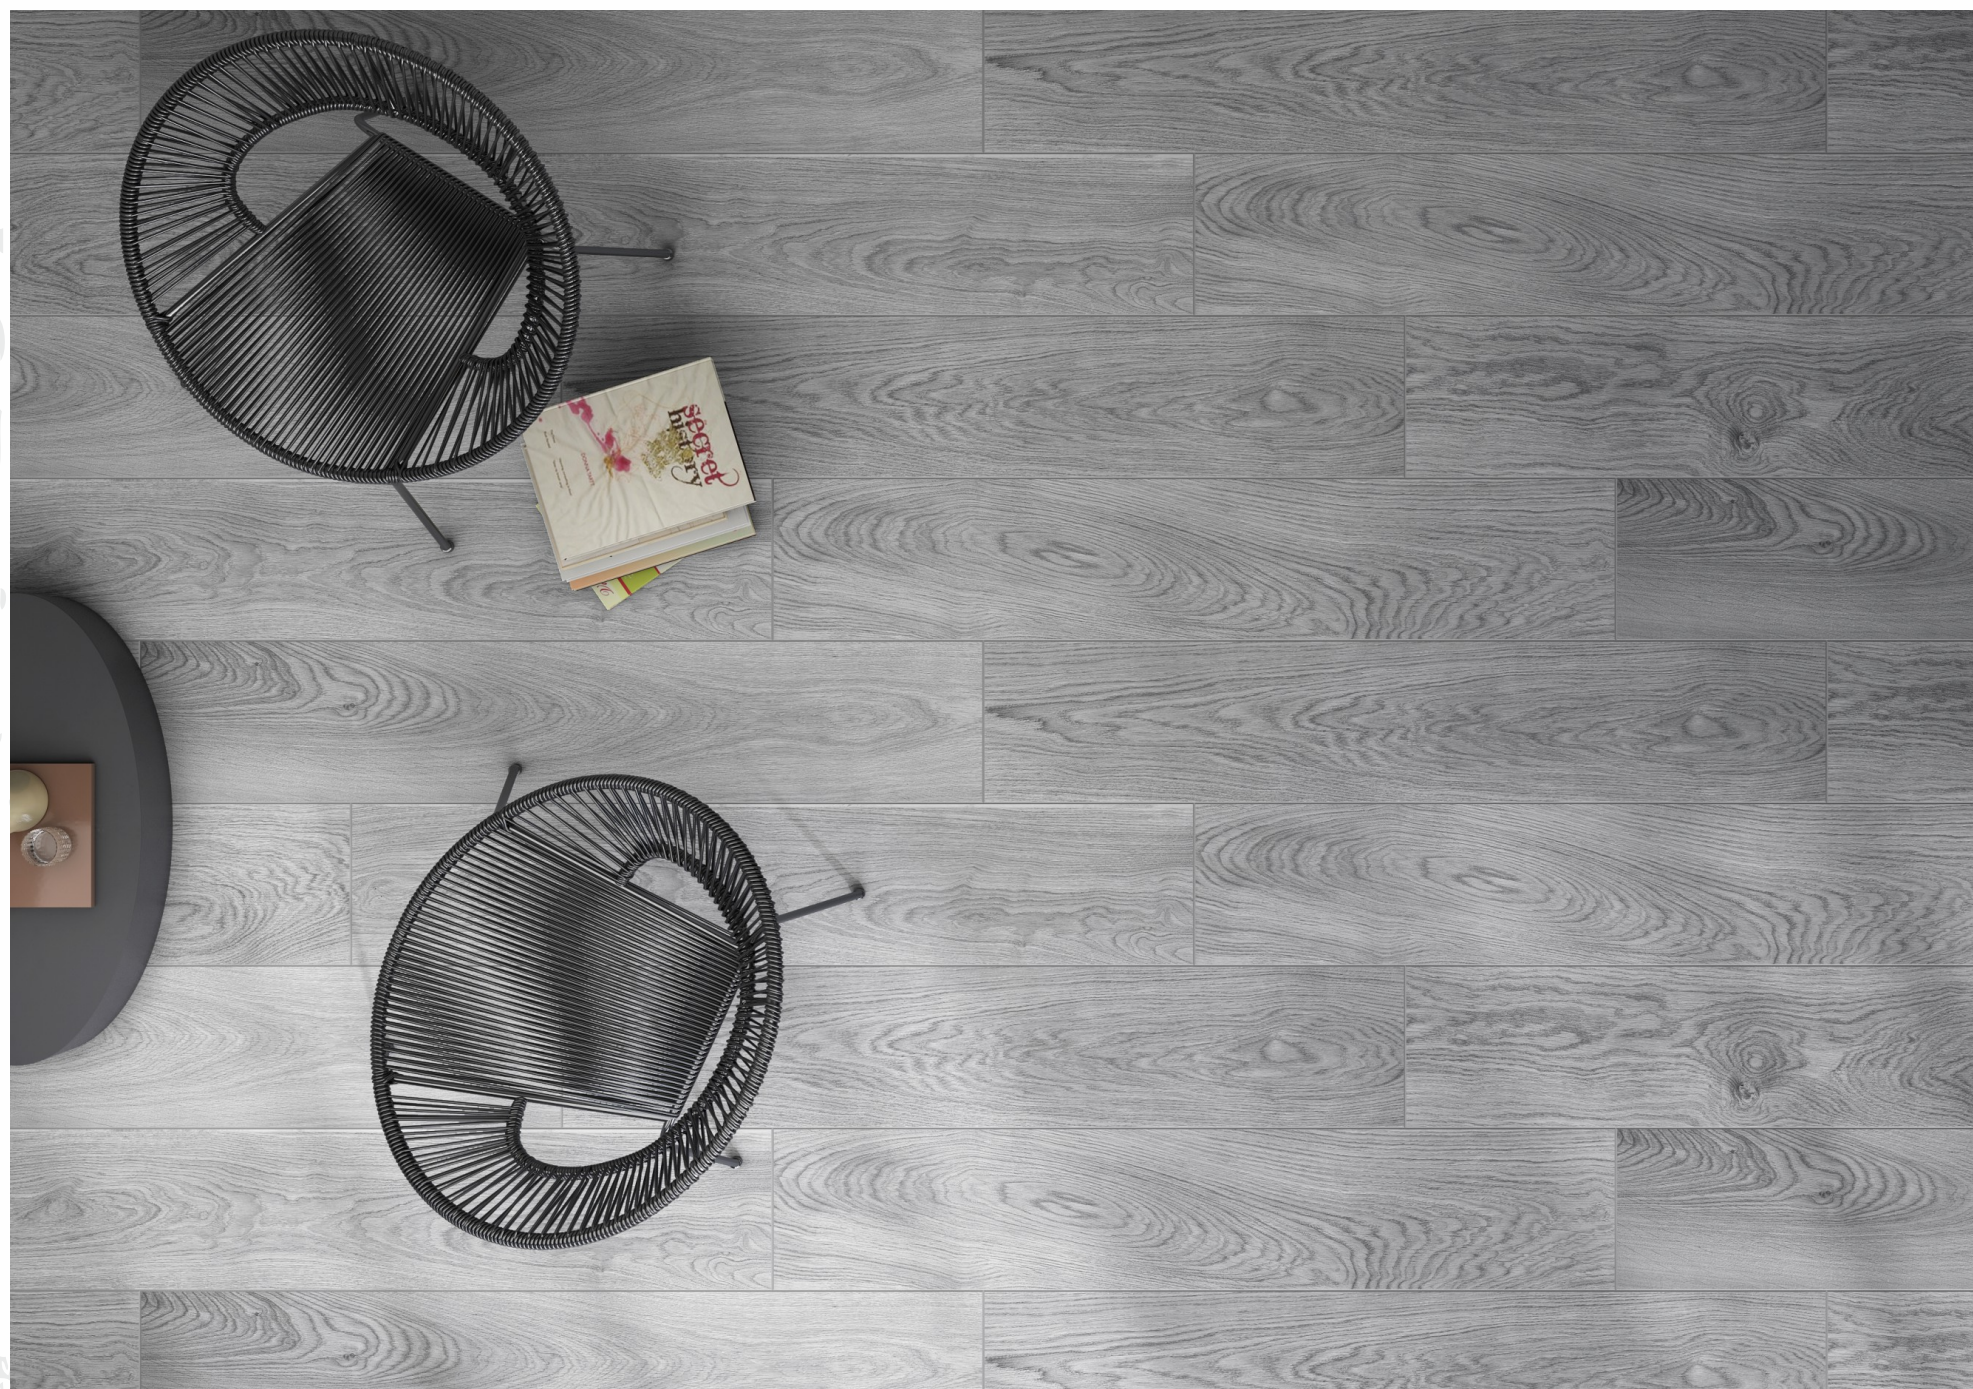

**200X  
1200MM**

RANDOM - 15

[www.geogres.in](http://www.geogres.in)





# REAL WOOD BIANCO



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9







# REAL WOOD BIANCO



**200X  
1200MM**

RANDOM - 15

[www.geogres.in](http://www.geogres.in)





# REAL WOOD NATURAL



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9







# REAL WOOD NATURAL



**200X  
1200MM**

RANDOM - 15

[www.geogres.in](http://www.geogres.in)





# REAL WOOD MAHOGANY

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9







# REAL WOOD MAHOGANY



**200X  
1200MM**

RANDOM - 15

[www.geogres.in](http://www.geogres.in)





# REAL WOOD OLIVE

PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9







# REAL WOOD OLIVE



**200X  
1200MM**

RANDOM - 15

[www.geogres.in](http://www.geogres.in)





# REAL WOOD PINE



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9







# REAL WOOD PINE



**200X  
1200MM**

RANDOM - 15

[www.geogres.in](http://www.geogres.in)





# REAL WOOD TEAK



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9







REAL WOOD  
TEAK




200X  
1200MM

RANDOM - 15

[www.geogres.in](http://www.geogres.in)



# LAYING SOLUTIONS

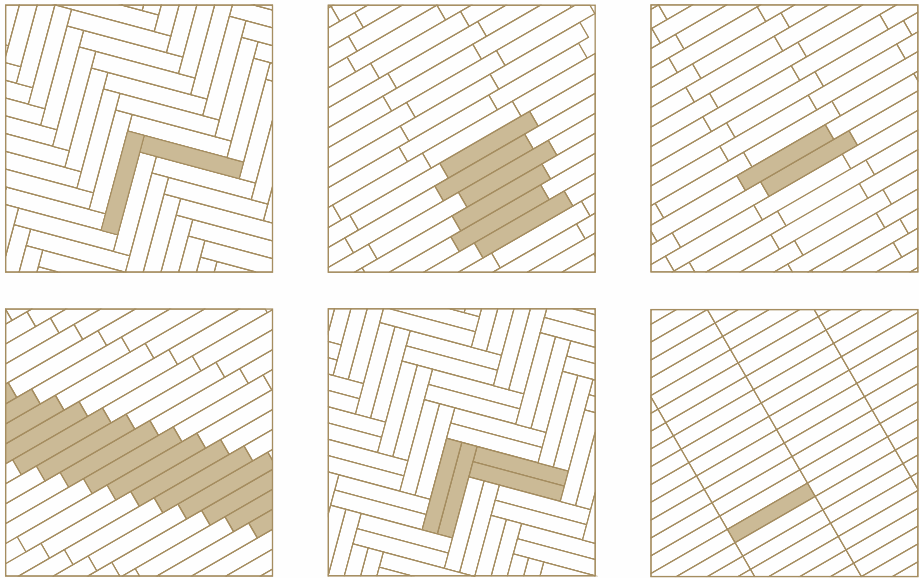


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

## Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group Bla, E ≤ 0.5%

TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR VaLUES
				RECTIFIED	MATT
DIMENSIONS		Length and width	ISO 10545-2	± 0,3%, max 1 mm	In According
		Thickness		± 5%, max 0,5 mm	In According
		Wedging		± 0,3%, max 1,5 mm	In According
		Straightness of the edges		± 0,3%, max 0,8 mm	In According
		Flatness		± 0,4%, max 1,8 mm	In According
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupter		R ≥ 35 N/mm <sup>2</sup>	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 <sup>-6</sup> max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



## INSTALLATION ADVICE

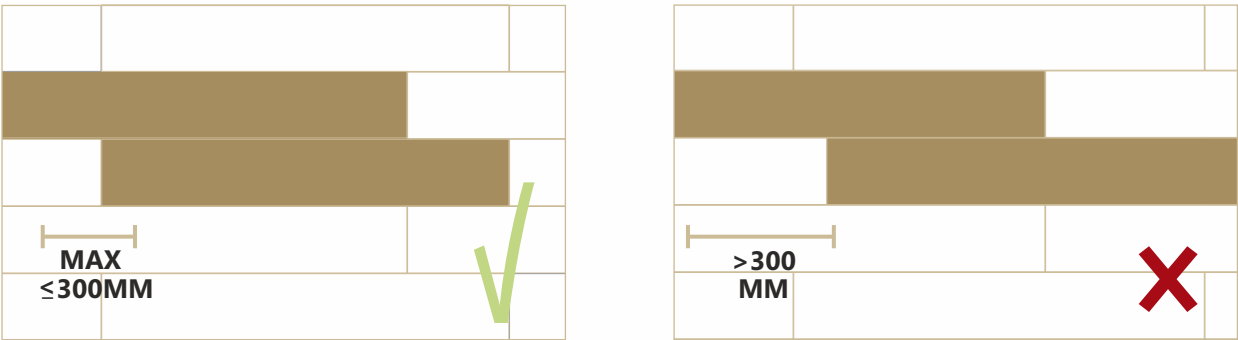

The longest side should be staggered no more than 300mm when laid in running bond.

## V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

## PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

## FEATURES



\*We need minimum 2000sq/mtr order for R11 surface





---

### **Delta Tiles Ltd.**

8 A National Highway Opp. 132 kva Sub- Station,  
At lalpar, Morbi - 363642, Gujarat, INDIA.

Export Enquiry : +91 98256 04212 | [export@geogres.in](mailto:export@geogres.in)  
Domestic Enquiry: +91 97277 04212 | [info@geogres.in](mailto:info@geogres.in)

**[www.geogres.in](http://www.geogres.in)**