



**LEQNO**

**200X  
1200MM**

[www.geogres.in](http://www.geogres.in)

**W  
O  
O  
D  
S**

LEQNO

LEQNO

SERIES



by



**FIND  
CREATIVITY  
FROM  
BASICS.**



**200  
X1200  
mm**

**SOLUTION TO ALL  
YOUR DESIGN NEEDS.**

Geo Gres offers a complete solution for porcelain floors and walls that consist of excellent technical performance and unique aesthetic appeal.

The variety and complete range of Geo Gres porcelain meets your needs of contemporary planning for indoor and outdoor design solution.

[www.geogres.in](http://www.geogres.in)



# THE FINEST WOOD WORK FOR THE FINEST LIVING.

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.







the warmth and  
softness of wood  
to the functionality  
of stoneware.







[www.geogres.in](http://www.geogres.in)

PINE

MAPLE





# LEQNO NMAPPLE

200X  
1200MM

RANDOM  
9

[www.geogres.in](http://www.geogres.in)



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9









# LEQNO

## PINE

200X  
1200MM

RANDOM  
9

[www.geogres.in](http://www.geogres.in)



PHASE - 1



PHASE - 2




PHASE - 3



PHASE - 4



PHASE - 5

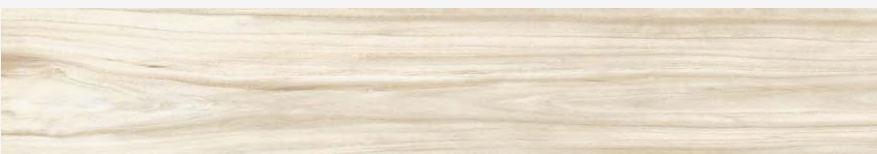

PHASE - 6



PHASE - 7



PHASE - 8




PHASE - 9







LAYING SOLUTIONS

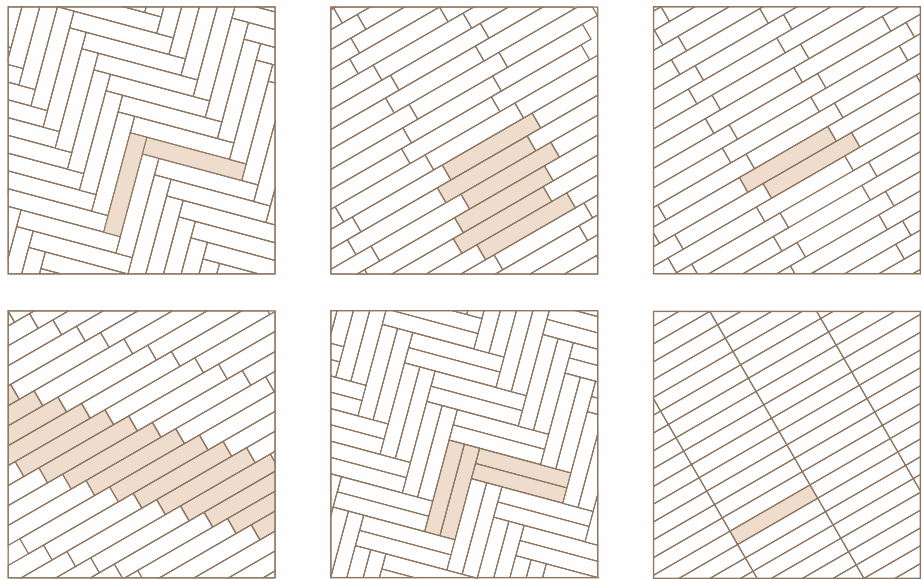


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

PORCELAIN STONEWARE - STANDARD EN 14411 (ISO 13006)  
ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR VaLUES
				RECTIFIED	MATT
DIMENSIONS		Length and width	ISO 10545-2	± 0,3%, max 1 mm	In According
		Thickness		± 5%, max 0,5 mm	In According
		Wedging		± 0,3%, max 1,5 mm	In According
		Straightness of the edges		± 0,3%, max 0,8 mm	In According
		Flatness		± 0,4%, max 1,8 mm	In According
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupter		R ≥ 35 N/mm <sup>2</sup>	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicater by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 <sup>-6</sup> max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9/R11*
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



INSTALLATION ADVICE

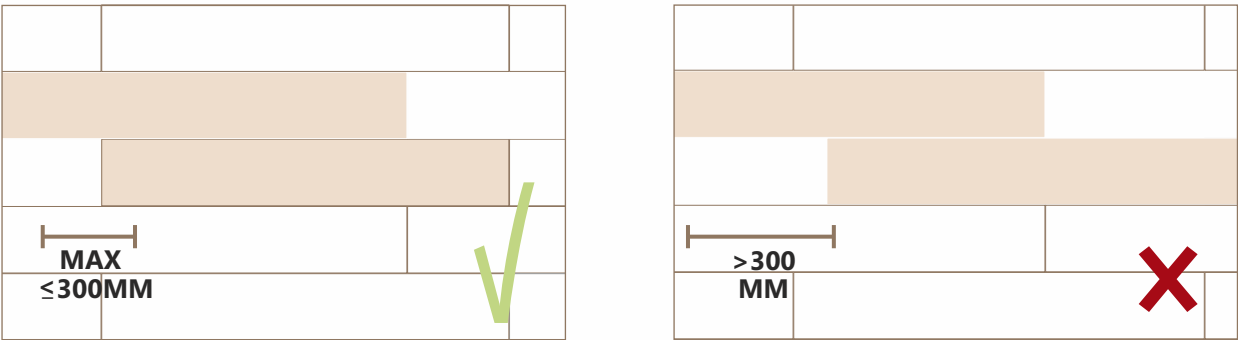

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES







by

**GeoGres Tiles**

Opp. 132 KVA Sub-Station,  
8-A N.H, Lalpar, Morbi - 363642,  
Gujarat, INDIA.

P : +91 98256 04212  
E : [export@geogres.in](mailto:export@geogres.in)